


OPERATION MANUAL

LED Flush Mount Light

With integrated dimmable driver

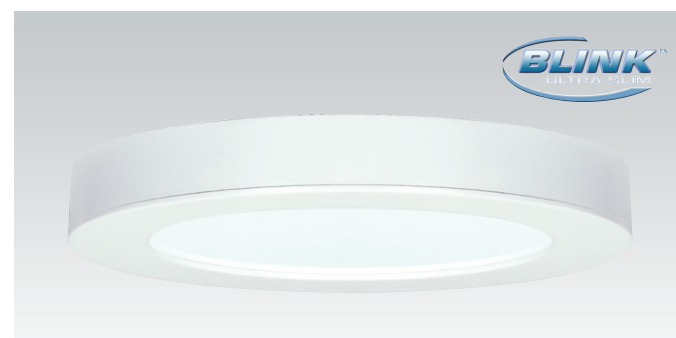

Thank you for purchasing our product. The device has been manufactured from components with advanced optoelectronics to ensure high reliability and long performance. Before assembling please carefully read this Operation Manual and save in a safe place for future reference. Please note that all electrical connections must be in accordance with local and National Electrical Code standards as well as local building code. In case you are not familiar with proper wiring connections and building codes consult a qualified electrician.

Technical Data

Power Consumption: 10.5W/13.5W/18.5W

Color temp.: 2700K/3000K/5000K

Life Span: 40,000h

Illumination authorization < 5%
per 10,000h



National Toll-Free:
800.43.SATCO
(800.437.2826)
www.satco.com

Distribution Centers:
New York, Florida, Texas,
Washington, California,
Puerto Rico

Corporate Offices:
110 Heartland Blvd.,
Brentwood, NY 11717
800.437.2826 631.243.2022
Fax 631.243.2027


SAFETY RECOMMENDATIONS

1. RISK OF ELECTRIC SHOCK – THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH MENTIONED ABOVE CODES AND HAZARDS INVOLVED. DISCONNECT POWER AT CIRCUIT BREAKER OR FUSE BEFORE INSTALLING OR SERVICING.
2. Before use of the product read carefully the whole Operation Manual.
3. THE PRODUCT IS PURPOSED FOR INTERIOR USE ONLY. SUITABLE FOR DAMP LOCATIONS
4. Protect the product against direct contact with water.
5. Assemble the product only with the use of parts provided and the housing; improper assembly may result in device falling which could damage the product, personal property or cause injury.
6. Assembly shall follow with accessories delivered with the set only.
7. The device is not a toy. KEEP OUT OF REACH OF CHILDREN.



As an ENERGY STAR® Partner, SATCO has determined that this product meets the ENERGY STAR® guidelines for energy efficiency.

INSTALLATION (Seven simple steps.)




STEP1

Δ Turn-off /
disconnect
power at circuit
breaker



STEP2

Attach connector
(provided) to AC
cable from Junction
Box



STEP3

Remove the installation
bracket from the back
of the fixture and attach
it to Junction box using
the 2 screws (provided)
- pull the AC cable with
connector through the
bracket center hole



STEP4

Connect AC cable
from the Junction
Box to the cable
from the light
fixture



STEP5

Raise fixture and
push the AC cable
into Junction Box



STEP6

Align slots on the
edge of fixture with
the ball bearings on
the mounting bracket
and PUSH to lock
fixture in place.



STEP7

Installed -
Congratulations...
Enjoy the light!

DIMMING

This product is compatible with most residential type dimmers available on the market. The dimming performance will depend on kind of dimmer and dimmer settings. Visit Satco.com for an up to date list of compatible dimmers.

CLEANING AND STORAGE

- Clean with a soft or damp cloth. While cleaning with the damp cloth make sure the power is off.
- Do not clean with liquids or abrasives.
- Store at ambient temperature.

FIVE YEAR LIMITED WARRANTY

The purchased product is covered with Five year (60 months) guarantee in respect of any defect in material or workmanship after purchase date.

SATCO shall bear no responsibility on account of guarantee, as well as shall bear no liability for any faults, in case of improper operation, use, negligence, accident or exposure to natural hazard, or excessive use over the limits specified for the unit, or if any unauthorised alteration or repair followed.